


PKC

LED Parking Lot Light

3-Power & 3-CCT Selectable



Feature

- Patent Design, Power selectable for easy to make inventory reserve
- the performance-to-price ratio superelevation
- IP66 Wet Location
- High efficacy, 180lm/w , CRI>70
- SCP/OVP/OTP protection driver, Multi-Voltage 100-277/347Vac
- 6KV/10KV surge protection
- Photocell, Daylight harvest, Microwave Sensor, 1-10V Dim Optional
- 5 Years warranty



Bracket Optional



Slip Fitter



Arm/Wall Mount




Trunnion




"U" Yoke Bracket

Dimension


• 150W-100W-75W

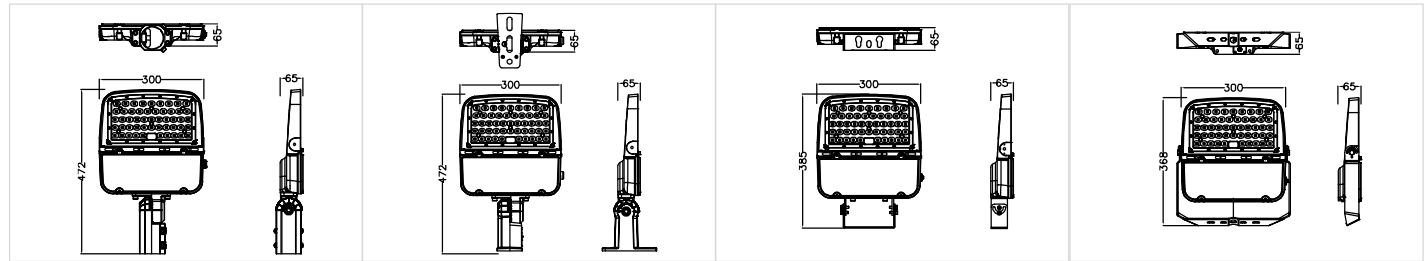

• 240W-200W-150W



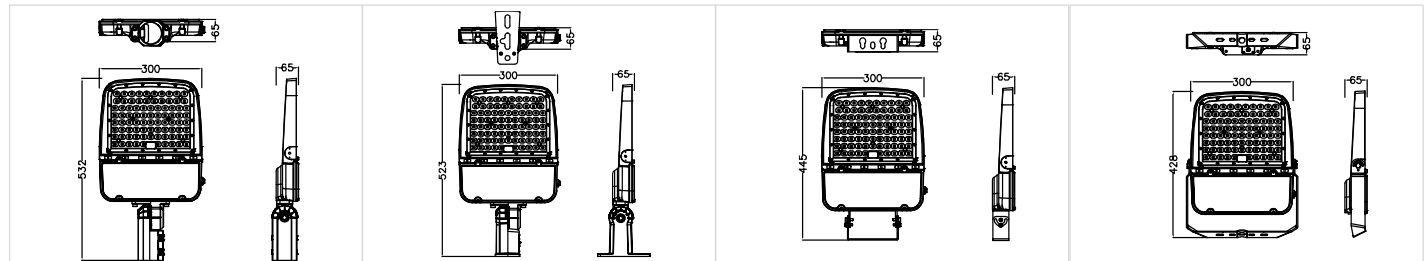


• 300W-240W-200W



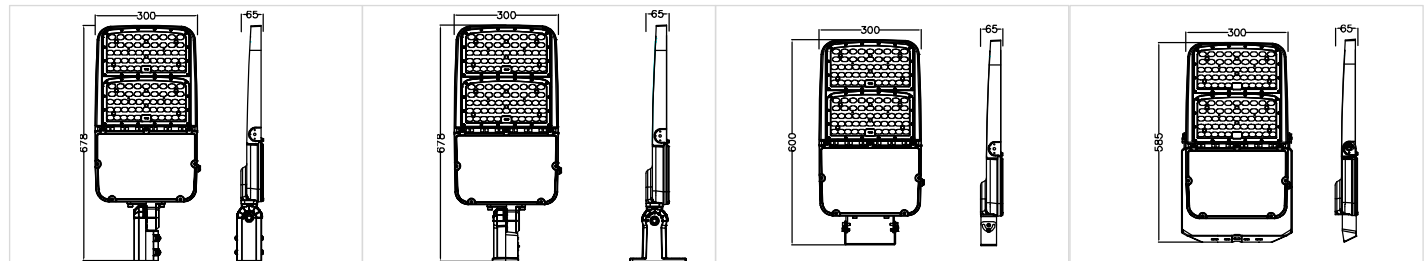


Distribution Optional



● TYPE 3

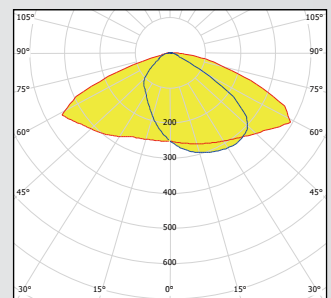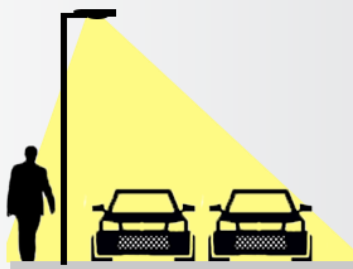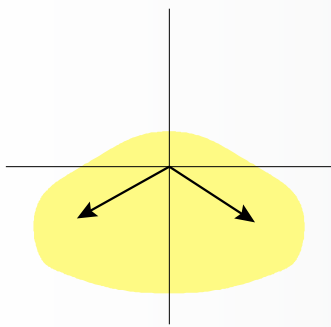


● TYPE 4

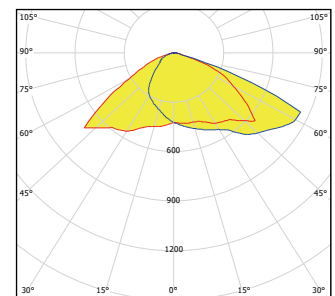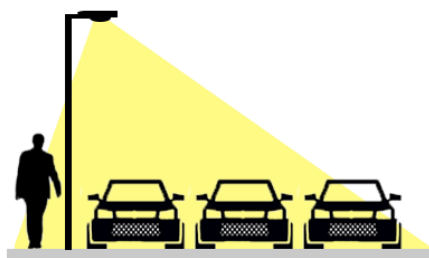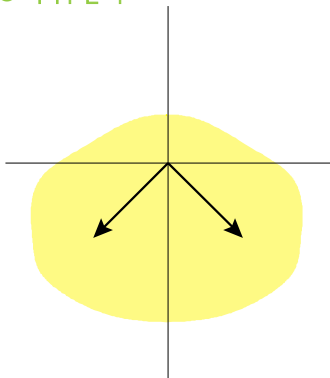

● TYPE 5

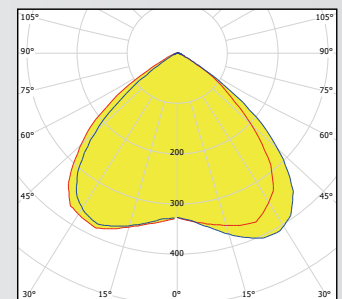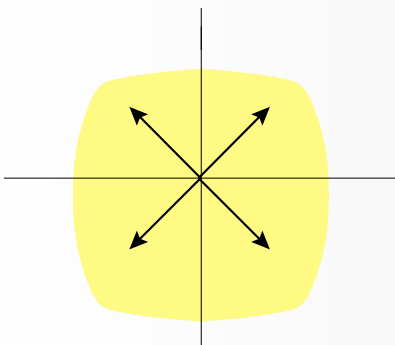

Function Optional



1-10V Dim



Photocell



Photocell
Microwave Sensor



Smart Control

Parameter

Model No.	PKC-150W/100W/75W	PKC-240W/200W/150W	PKC-300W/240W/200W
Wattage Switchable	150W/100W/75W Switchable	240W/200W/150W Switchable	300W/240W/200W Switchable
Luminous Efficacy	180LPW@75W 175LPW@100W 160LPW@150W	180LPW@152W 175LPW@200W 165LPW@240W	180LPW@200W 175LPW@240W 160LPW@300W
Lumens output	13500lm@75W 17500lm@100W 24000lm@150W	28000lm@152W 35000lm@200W 40000lm@240W	36000lm@200W 42000lm@240W 48000lm@300W
MF Equivalent	300W-600W	800W-1000W	1000W-1500W
Fixture Weight	3.6kg(8.0lb)	4.4kg(9.7lb)	kg(lb)
LEDs QTY	196	336	392
LEDs Type	SMD3030		
CCT	3000, 4000K, 5000K,5700K		
CRI	70+		
Beam Angle	TYPE3, TYPE4, TYPE 5		
Input Voltage	100-277V/347Vac		
Surge Protection	6KA / 10KA		
Function	1-10V Dimming, Photocell, Motion Sensor Optional		
Power Factor	>0.95		
IP Rating	IP66 /Wet Location		
Working Temp.	-40° C ~ 50° C (-40° F~122° F)		
Storage Temp.	-40° C ~ 70° C (-40° F~158° F)		
Finish	Dark Bronze		
Lifespan(>70)	>100,000 Hours		
Warranty	5 Years warranty		
Certification	ETL, cETL, DLC5.1 Premium		

Order Information

Sample: PKC-150W-50K-D

	-XXX	-Y	(X)
Product Family	CCT	Dimmable	Brackets
PKC-150W/100/75W	30K = 3000K	D = 1-10V Dim	A = Slip Filter
PKC-240W/200W/150W	40K = 4000K	P = Photocell	B = Arm Bracket
PKC-300W/240W/200W	50K = 5000K	S = Motion Sensor	C = Trunion
	57K = 5700K		D = "U" YOKE Bracket
In Standard		Options (add as Suffix)	
Dark Bronze Finish, 2FT length cable 100-277V/347Vac, 50-60Hz, 1-10V Dimmable T3 Distribution 160-180lm/w CRI>70 Photocell at Side		BK = Black Finish (MOQ>200pcs) WH = White Finish (MOQ>200pcs) T4 = T4 Distribution (MOQ>300pcs) T5 = T5 Distribution (MOQ>300pcs) Other customized	

Bracket (order Separately)

If you order the lamp body without bracket, please order bracket separately

Model No:	PKC-A	PKC-B	PKC-C	PKC-E	PKC-R4 /R5 /R6
Description:	Slip Filter	Arm (adjustable)	Trunion	YOKE bracket	Round Pole Sheet (4, 5, 6 inch)
Picture:					

* Note: Round pole sheet PKC-RX shall be used with PKC-B bracket together.

Package Information(with Bracket Together)

ITEM	QTY/CTN	G. W.	CTN SIZE	Means(CBM)	QTY/20GP	QTY/40HQ
PKC-150/100/75W	3pcs	13.9kg	36.5*35*45cm	0.066	1200	2900
PKC-240/200/150W	3pcs	15.9kg	43*35*50cm	0.076	1050	2500
PKC-300/240/200W						