

Benefits

- 1.Internal UL listed power supply.
- 2.Replace conventional Gas Station Lights.
- 3. Precision Die Cast Aluminum Heat Sinks.
- 4. Fade Resistant Powder Coat Finish.
- 5.Easy & quick Installation.
- 6.CE ROHS listed.






CE ROHS

BB-CSD-XXXX-C1

Features

- 1. Aluminum die-casting heat sinks is good for heat dissipation.
- 2.It's major to replace the conventional gas station light.
- 3. Green, energy saving, long and reliable life of 50,000 hours.
- 4. No RF interference, No IR/UV radiation , no mercury pollution.
- 5. Wide colour availability in degrees Kelvin(K),2700-6700K.
- 6. Streamline exterior design, beautiful appearance.
- 7. Environment friendly ,energy saving (70~80%).
- 8. Special circuit design, each LED work separately, avoiding the single broken LED influence problem.

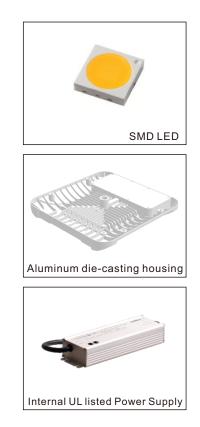

Application


- 1.Gas station lighting.
- 2.Petroleum canopies lighting.
- 3.CNG fueling stations lighting.
- 4.Low-medium bay general lighting.
- 5.Soffits lighting.



SPECIFICATIONS

Power	100W	150W	200W	240W	300W			
Model	BB-CSD-100W-C1	BB-CSD-150W-C1	BB-CSD-200W-C1	BB-CSD-240W-C1	BB-CSD-300W-C1			
Luminous Flux	14000lm	21000lm	28000lm	33600lm	42000lm			
Replacement	HPS 300W	HPS 400W	HPS 600W	HPS 800W	HPS 1000W			
Light Source	SMDLED							
Luminous Efficacy	140lm/w							
Operation Temp.	-40 to +45℃							
ССТ	3000K WW / 4100K NW / 5000K DW / 5700K CW							
CRI	70+							
Life Span	50,000 hours at 25℃							
Voltage	100-277VAC/50-60Hz 200-480VAC/50-60Hz Available							
Driver	Internal LED Driver							
Dimming	Available							
Beam Angle	120°							
PF	>0.95							
Warranty	5Years							

DIMENSIONAL DRAWING

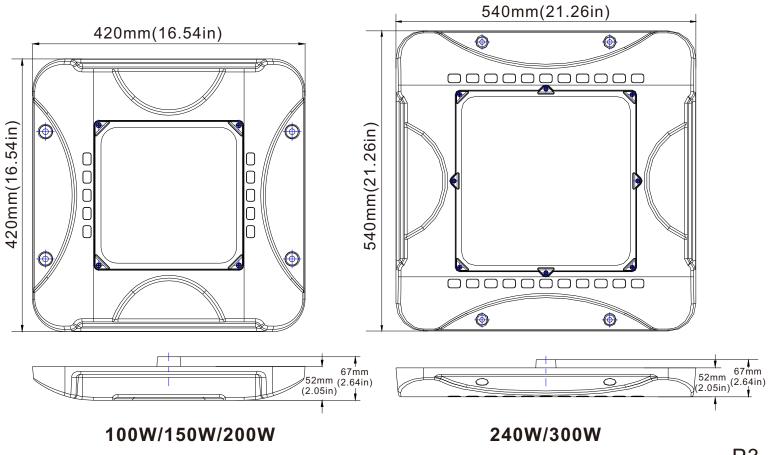



By using our 150W Gas Station Light to replace 400W Metal Halide bulb for traditional petrol station lighting in world filling station ,the customer is now able to save a lot per month from his electric bill.



150W LED = 400W HPS/HID

Note:

- Don't take the LED lamp apart.
- The LED lamp must work under the right voltage according to the specification.

PACKING INFO



Packaging	Dimensions (L*W*H)	N.W	G.W	Volume weight
100W/150W/200W 1pcs/Box	465*460*120mm	3.5kg	4.5kg	6.5kg
240W/300W 1pcs/Box	585*580*120mm	4.5kg	5.5kg	10.0kg